## The Thermo Infused Wear Layer means NO Stain - The color goes all the way through!

The surface layer of the hardwood is heat treated with a special thermo infusion process that activates the sugars in the wood. This thermo infusion process naturally deepens and enhances the true color and character of each piece of wood. NO stains, NO chemicals, NO solvents! The deep colors and three dimensional, opalescent appearance of the enhanced grain turn ordinary into something quite extraordinary.

Harmonized Color Variation: The thermo infused process enhances the wood's grain and color, creating color variation and a unique appearance in each flooring board, compliments of Mother Nature.

### NORTHERN EXOTICS COLLECTION

Natural Cherry Specie: Americxan Cherry

Natural Walnut Specie: American Walnut

Sunset Maple Specie: Hard Maple Thermo Infused

Harvest Maple Specie: Hard Maple Thermo Infused

Sienna Maple Specie: Hard Maple Thermo Infused

Saddle Maple Specie: Red Maple Thermo Infused / Handscraped

Coffee Maple Specie: Red Maple Thermo Infused / Handscraped

Saddle Hickory Specie: Hickory Thermo Infused / Handscraped

Leather Hickory Specie: Hickory Thermo Infused / Handscraped From the Forest, LLC, located in Central Wisconsin, is a state-of-the-art engineered wood flooring manufacturing company with access to a ready supply of North American hardwoods. Our raw materials are sourced only from managed forests in the United States. We are a Forest Stewardship Council (FSC) certified company (SCS-COC-002106) dedicated to preserving our natural resources and environment. Our WearMax® ceramic based, wear resistant top coats are UV cured to protect air quality. Our adhesives are formaldehyde free and meet the highest standards for air emissions.

## Residential Limited Warranty: 25 Years

- 1. The finish will not wear through in normal residential conditions with proper
- 2. Flooring will be free from manufacturing defects for as long as you own your home (original purchaser only). Manufacturing defects are improper milling, laminating, or
- 3. Flooring will not gap between boards after installation.

#### This limited warranty is made subject to the following conditions:

- . The flooring must be used only indoors in residential areas and installed and used in accordance with our installation procedures and jobsite requirements.
- The installation was done in compliance with the written instructions.
- No warranty coverage is provided for flooring that contains obvious defects of any kind that were installed nonetheless.
- . The surface wear must not have occurred as a result of incorrect maintenance or accidents such as damage caused by scratching, impact, or cutting. It must be readily visible and be 10% or more of the floor.
- · Wood is a natural product; variations in its grain pattern, color, and or texture are normal and are not considered defects and no warranty shall apply to those. For wood flooring that has a thermo infused hard wood layer, significant color variations will occur from board to board and should be expected. The warranty will not apply to the natural color changes which occur in wood over time due to UV light exposure. Area rugs should be moved periodically to minimize the effects of UV light on hardwood
- The relative humidity in the house is maintained between 30% and 60%.

#### **Preventative Maintenance**

To ensure full enjoyment from your floor and to extend its beauty for years to come, the following list of guidelines should be followed.


- Install floor protectors on furniture legs to protect against scratches and dents. These furniture pads should have no wrinkles and be made of soft, non staining material (i.e. felt pads)
- Do not drag or roll furniture or other heavy objects across the floor. Rollers from refrigerators, TV's, stereos, etc will dent the floor. To prevent the denting first lay 1/2" plywood on the floor and roll the appliance or heavy furniture on the plywood.
- · Avoid high heels or shoes with protruding nails. Some types of high heel shoes can severely damage the surface of any floor covering.
- Sweep and vacuum floor regularly.
- · Avoid sand and grit build up. Use protective mats or rugs at doorways and areas of
- Never use latex or rubber backed mats or rugs; they will permanently stain the floor
- Place protective mats under chairs with wheels
- Use only recommended cleaning products from your dealer
- · Never wet mop your floor. Never wax or use oil-based products on your floor. See our website www.fromtheforest.com for complete warranty information.



Exclusively by:



THE WOOD SPECIALISTS

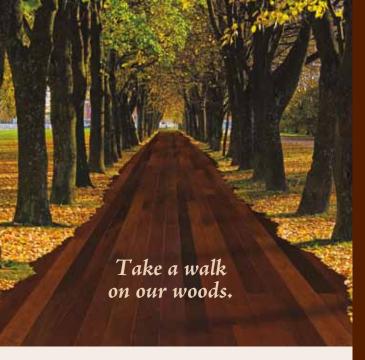

# WEARMAX Topcoat is:



Stain Resistant
Easy Clean-up. No worries.
Wear Resistant
Scuff Resistant

No visual walking patterns or reduction in gloss over time.

## Plus




## No Gaps Between Boards

Valinge Patented Click profile with Core 360° ensures a consistent fit between boards and is guaranteed to withstand gapping between boards due to seasonal changes in humidity.



The multi-directional high density wood fiber core expands and contracts

monolithically providing maximum dimensional stability. This moisture resistant core is also denser than plywood and provides the perfect platform for indentation resistance and click installation.

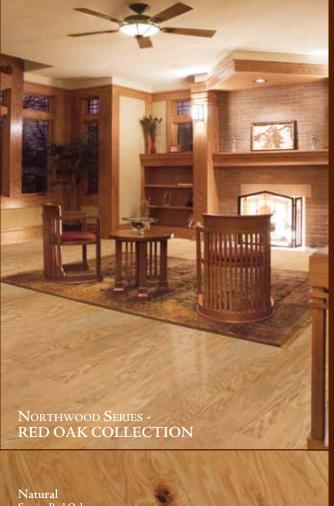


Natural Specie: Red Oak

Suede Specie: Red Oak

Chestnut Specie: Red Oak

Nutmeg Specie: Red Oak



Natural Specie: Maple

Graphite Specie: Maple

Slate Grey Specie: Maple

Cinnamon Specie: Maple

Product Specifications: Northwood Series <sup>3</sup>/<sub>8</sub>" x 4 <sup>1</sup>/<sub>4</sub>" x 47 <sup>1</sup>/<sub>2</sub>" 21.5 sf/ctn

Northern Exotics
<sup>3</sup>/<sub>8</sub>" x 5" x 47 <sup>1</sup>/<sub>2</sub>"
25.6 sf/ctn