

BEST YARDING PRACTICES

Effective Yard Care

GOODFELLOW *Terra*®

With the introduction of earth tone shades of pressure treated lumber into the marketplace, it has led the consumer/contractor to have higher expectations. Here are a few recommendations:

- 1 Place sufficient crossers or bunks underneath the lumber to provide adequate support. Generally, line up with wood slats.
- 2 Multiple stacked lifts shall have crossers or bunks lined up with lower level.
- 3 Un-wrap only one lift at a time.
- 4 Keep wraps or covers on open lifts.
- 5 Keep open lifts stacked evenly, drawing lumber from the top (not sides).
- 6 Turn top boards daily.
- 7 Rotate stock regularly.
- 8 Remove cull (if any) to a separate area to be processed.
- 9 Keep area neat and tidy, removing stickers, banding, spent wrap and debris.
- 10 Assist customers that enter your treated wood area.



*Example of pressure treated lumber.
This particular dealer has near zero downfall.*



*Protection of white framing lumber
is equally important.*




Example of unprotected white framing lumber.



Example of unprotected pressure treated lumber.



Example of making a "hold down" for lumber wrap.

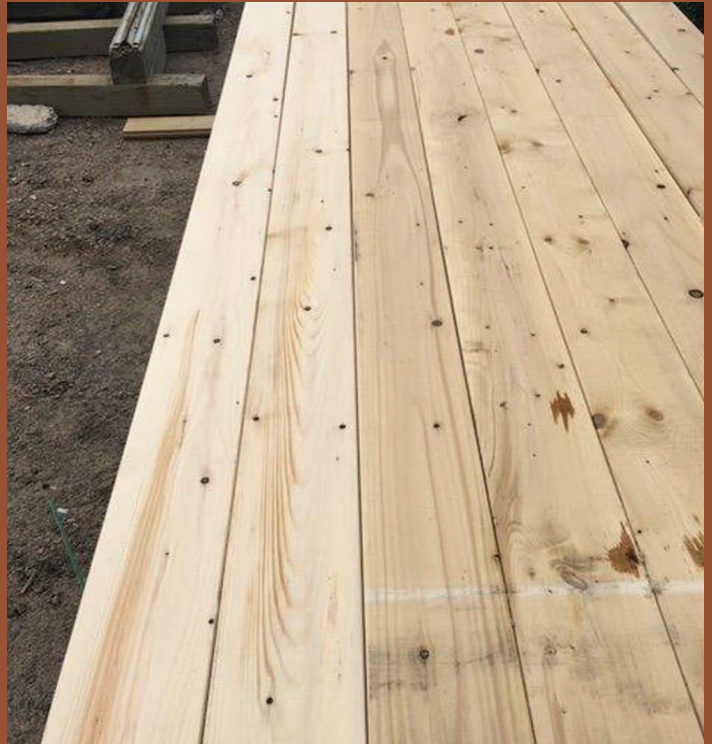

All wood weathers (2 boards on left flipped over). Tarps provide a fresh look to inventory.

PROTECT YOUR INVESTMENT!

GOODFELLOW 