

# **Surround<sup>®</sup>** SR Underlayment

A Typar<sup>®</sup> Brand



MAKE THE SWITCH TO  
**SURROUND<sup>®</sup> SR**  
SYNTHETIC UNDERLAYMENT.

# SURROUND YOUR HOMES WITH THE BEST.

Surround® SR synthetic roofing underlayment provides the optimal balance of high performance, enhanced safety, and streamlined installation for contractors. As a result, you can deliver peace of mind for homeowners that you can't get with 30# felt.

## HIGH PERFORMANCE.

Surround SR does not absorb moisture, won't warp or buckle when wet, and will not degrade when exposed to UV light for up to 6 months.

## ENHANCED SAFETY.


Surround SR is slip-resistant when surfaces are dry, and provides better traction when wet than 30# felt and many other synthetics. It also features a heat-reflecting, gray-colored surface, which reduces the amount of heat buildup on the roof.



Protects the deck better than other underlayments at a competitive cost

Larger rolls mean fewer trips up and down the ladder during installation

We stand behind the performance—industry-leading 30-year warranty

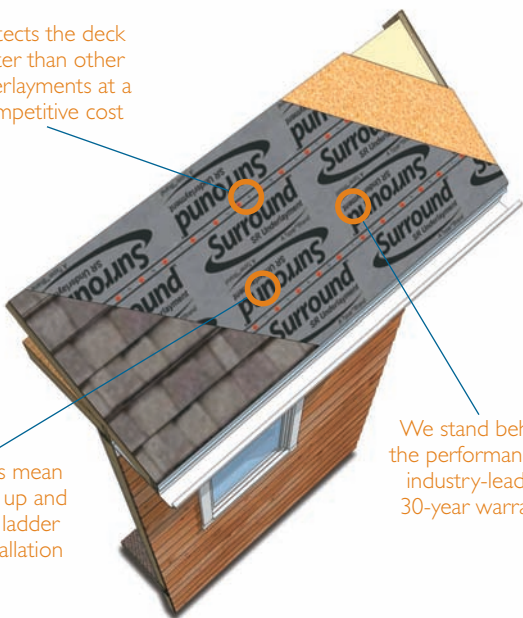

## STREAMLINED INSTALLATION.

With a tensile strength that's 10 times greater than 30# felt, it's unlikely to rip or tear underfoot. And since one roll covers the same area as five rolls of 30# felt (and weighs 10 times less), it's much easier to handle and install.

## PEACE OF MIND FOR HOMEOWNERS.

As a synthetic underlayment, Surround SR provides an additional proven layer of protection. It helps keep the deck dry, which maximizes the life of the roof system.



**Surround**<sup>®</sup>  
SR Underlayment  
A Typar<sup>®</sup> Brand

Brought to you by

**TYPAR®**

The industry leader in weather protection.

## SURROUND SR UNDERLAYMENT TYPICAL CHARACTERISTICS

Property	Test Method	Result
Class A Burning Brand and Intermittent Flame	ASTM E108	Pass
Nail Sealability	ASTM D1970	Pass
Pliability	AC48 sec 4.3	
Machine Direction		Pass
Cross Direction		Pass
Water Ponding	AC48 sec 4.4	
Control		Pass
Accelerated Aged		Pass
Accelerated Aging	AC48 sec 4.7	Pass
UV Exposure	AC48 sec 4.8	Pass
Moisture Vapor Transmission	ASTM E96-00 Desiccant Method	0.4 perms
Tensile Strength (UV Exposed)	ASTM D1682-64 (1975)	
Machine Direction		112
Cross Direction		126
Tensile Strength (Accelerated Aged)	ASTM D1682-64 (1975)	
Machine Direction		109
Cross Direction		128
Weight per Square	ASTM D5261	2.6 lbs/ 100 ft <sup>2</sup>

## SURROUND SR UNDERLAYMENT SPECIFICATIONS

Roll Length.....267'	Rolls per Pallet..... 36
Roll Width..... 45.25"	Pallet Weight..... 965 lbs
Roll Weight ..... 26 lbs	Pallet Dimensions..... 48" x 48" x 45.25"
Roll Area..... 10 sq	

**30-Year Limited Product Replacement Warranty**

# BETTER PERFORMANCE. BETTER PROTECTION. BETTER RESULTS.

- 10X stronger and lighter than 30# felt
- Easier to handle and install
- Doesn't absorb water
- **One 10-square roll** covers the same area as **five rolls** of 30# felt



**Surround<sup>™</sup>**  
SR Underlayment  
A Tector<sup>®</sup> Brand

**Synthetic Roof Underlayment**  
10 Square Roll - 1001 Square Feet  
26 lbs (11.8 kg) 48" x 267" (114 cm x 78m)

Covers the same as 5 rolls of 30# felt

Waterproof - Lightweight - All Purpose  
30 Year Limited Product Replacement Warranty

**Safety Precautions**  
The following information is provided for your safety.  
1. Consult with an OSHA approved safety professional.  
2. Always use proper fall protection.  
3. Use caution when handling this product.  
4. Use roof jacks, toe boards, and safety harnesses to prevent falling.  
5. Do not work on a roof with a slope greater than 12:12.  
6. Do not work on a roof with a slope greater than 12:12.  
7. Follow local safety regulations.  
8. Have appropriate safety equipment.  
9. Follow the manufacturer's instructions.

**Installation Instructions**  
1. The roof must be clean, dry, and free of debris.  
2. Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.  
3. Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.  
4. In critical areas, Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.  
5. Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.  
6. Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.  
7. Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.  
8. Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.  
9. Surround<sup>™</sup> SR Underlayment should be installed over a minimum 1/2" thick substrate.

**WARNING**  
This product is not intended for use as a waterproofing membrane.  
© 2014 Tector, Inc. All rights reserved.

# WE KEEP YOU COVERED.



- Backed by 30-year limited warranty
- Unlike 30# felt, provides synthetic strength that can withstand high winds and storms, especially in coastal regions
- Meets ICC and Miami-Dade County codes
- Can be used under most types of roofing including asphalt shingles, wood shakes and tile

***Surround***  
**SR Underlayment**  
A Typar® Brand

Fiberweb, Inc. • 1-800-284-2780 • [SurroundTypar.com](http://SurroundTypar.com)



Made in the U.S.A.  
TYPAR® and Surround® SR  
Underlayment are registered  
trademarks of Fiberweb, Inc.

© 2011 Fiberweb, Inc.  
SSR 09018 Rev. 05/11