


COMFORTBATT®

Thermal Batt Insulation

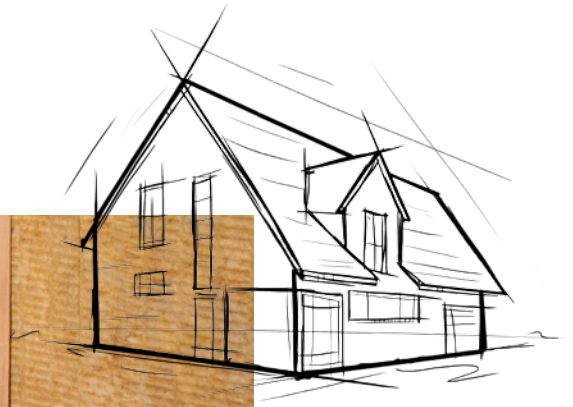

ROCKWOOL COMFORTBATT® is a semi-rigid stone wool batt insulation for exterior wood and steel stud applications in both new construction and renovations.

It features a unique flexible edge designed to compress as the batt is inserted then spring back, expanding the batt against the frame studs to give a complete fill. This flexibility ensures the expected R-value is achieved and maintained.


Non-combustible and fire resistant, COMFORTBATT® will not develop toxic smoke or promote flame spread, even when exposed directly to a fire. It also offers water and moisture resistance and excellent sound absorbency.

COMFORTBATT® is an effective way to improve a home's energy efficiency. It is GREENGUARD Gold Certified and contributes to a healthier indoor environment.

Learn more at rockwool.com

Easy Fit

Easily cut to achieve an optimal fit around pipes, electrical wiring boxes, ductwork and between studs and joists that are less than standard width.

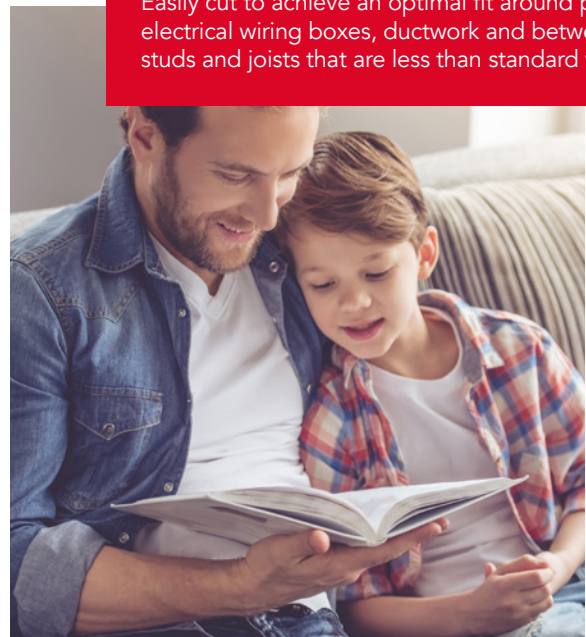

COMFORTBATT®

Thermal Batt Insulation

Technical Data Sheet

Batt Insulation 07210*
Blanket Insulation 07 21 16**

ROCKWOOL COMFORTBATT® is a mineral wool batt insulation designed for thermal resistance in wood and steel framing.

	Performance	Test Standard	
Compliance	Mineral Fibre Thermal Insulation for Buildings, Type 1 Compliant	CAN/ULC S702	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0	CAN/ULC S102	
	Determination of Non-combustibility of Building Materials - Non-combustible	CAN/ULC S114	
Density	> 2 lbs/ft ³ (>32 kg/m ³)	ASTM C167	
Thermal Resistance	Wood Stud	Steel Stud	ASTM C518
	R14 (RSI 2.47) - 3.5" thick (89 mm)	R10 (RSI 1.76) - 2.5" thick (64 mm)	
	R22 (RSI 3.87) - 5.5" thick (140 mm)	R14 (RSI 2.47) - 3.5" thick (89 mm)	
	R24 (RSI 4.23) - 5.5" thick (140 mm)	R22.5 (RSI 3.96) - 6" thick (152 mm)	
	R28 (RSI 4.93) - 7.25" thick (184 mm)	R24 (RSI 4.23) - 6" thick (152 mm)	
	R32 (RSI 5.64) - 8" thick (203 mm)		

Dimensions

Wood Stud 16" (406 mm) on centre: 15.25" x 47" (387 mm x 1194 mm)
 Wood Stud 24" (610 mm) on centre: 23" x 47" (584 mm x 1194 mm)
 Steel Stud 16" (406 mm) on centre: 16.25" x 48" (413 mm x 1219 mm)
 Steel Stud 24" (610 mm) on centre: 24.25" x 48" (616 mm x 1219 mm)



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.