


PRO-20

A New Generation of Underlayments



PRO-20 - A New Generation of Underlayments Protecting You and Your Roof

Our superior nonwoven surface provides excellent anti-slip protection when you're working on the roof

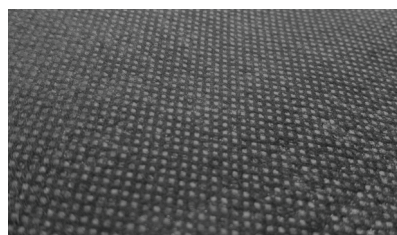

FT Synthetics products come with over two decades of research through listening to our customers, engineers, architects, roofing contractors and installers, and home owners. Our products provide ultimate high performance and protection for the installer and your home. Our products are fully synthetic, 100% recyclable, offer superior grip protection, excellent UV resistance, are the most pliable and of course are easy to use. They are light weight, but durable and provide the best protection available in the market. **PRO-20** is your cost effective and reliable 15 pound felt replacement product, which is easy to carry, and has 2.5X more coverage per roll as compared to felt.

- Superior nonwoven slip resistance surface
- Product thickness 10 mils
- 90 day UV resistant
- Greater coverage per roll
- 100% recyclable water resistant polyolefin construction
- Wrinkle free and low temperature flexibility for ease of installation

PRO-20 is your ultimate protection on the roof, working in any weather condition. FT Synthetics has focused its research towards roofer safety and ease of use. **PRO-20** is light weight, easy to carry, cool to the touch, and pliable under extreme temperatures. **PRO-20** has a wrinkle free surface, lays flat and straight over longer distances (unlike many products in the market which ripple and curve) and stays put with its underside non slip coating. All of these features combined with its print design result in easier, faster and more accurate installations. **PRO-20** can be used in most types of installations, whether they are commercial or residential. It can be used with wood, asphalt, and synthetic shingles and residential metal roofing. **PRO-20** meets and exceeds required industry standards.

ASTM D226-97
ASTM D4869
CAN/CSA A123.3




CAN/CSA A220.1
ASTM E108
CRR 1028
AC188



FT SYNTHETICS

Unit 1-13120 - 76th Avenue
Surrey BC V3W 2V6
Canada

Toll Free Ph: 1-844-353-9839
Phone: 604-594-3439
Fax: 604-594-3589
www.ftsyn.com



PRO-20

A New Generation of Underlayments

FT SYNTHETICS PRO-20

General Specifications

	PRO-20	#15 Felt
Width inch	42	36
Weight per roll	22 lb	45 lb
Length in feet	286	144
Rolls per Pallet (42 x 42)	49	25
Rolls per Truckload - 40 Skids	1066	1000
Rolls Required per 1,000 Sq feet	1	2.5
100% Recyclable	Yes	No
Material Composition	Polyolefin	Asphalt
UV Resistance	3 Months	None
Breaking Strength ASTM D 5034 MD	101 lb (45 kg)	NA
Breaking Strength ASTM D 5034 CD	96 lb (44 kg)	NA
Tear Strength ASTM D4533 MD	25 lb (11 kg)	NA
Tear Strength ASTM D4533 CD	23 lb (10 kg)	NA
Water shower Exposure ASTM D 4869	Pass	NA
Permeability ASTM E96	<0.05 Perms	6 Perms
Mullen Burst	102 psi	NA
Nominal Thickness ASTM D1777	10 mils	21 mils
Temperature Range	-40°F to 240°F	
Enhanced Slip Resistant Surface	Excellent	Basic
Limited Warranty	20 Years	None

The Data shown above is based on the test averages and independent test reports. There can be a +/-10% variation in the individual test results. This report should not be considered as a warranty for the manufacturer. The manufacturer is not responsible for the misrepresentation or misinterpretation of the Data by the reader. Please find out more about the product by calling 1-844-353-9839 or visit www.ftsyn.com. The FT Synthetics Logo and GRIPSPOT™ are registered trademarks of FT Synthetics Inc.

ASTM D226-97
ASTM D4869
CAN/CSA A123.3



CAN/CSA A220.1
ASTM E108
CCRR 1028
AC188



FT SYNTHETICS

Unit 1-13120 - 76th Avenue
Surrey BC V3W 2V6
Canada

Toll Free Ph: 1-844-353-9839
Phone: 604-594-3439
Fax: 604-594-3589
www.ftsyn.com